


12M LC/SC MM DPX 62.5/125UM Fiber Patch Cord

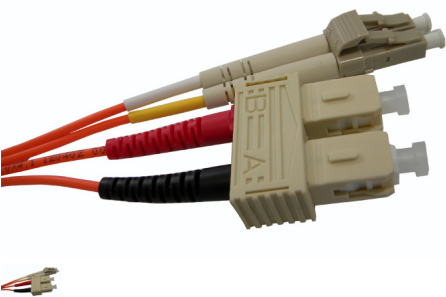

Part No. FB-LC-MD6-12

Rating: Not Rated Yet  
24 h  
\*\*\*\*\*

[Ask a question about this product](#)

Manufacturer [Cables and Chips Inc](#)

Description

Connector Specification

|                            |           |                |
|----------------------------|-----------|----------------|
| OPTICAL PERFORMANCE        | MULTIMODE | CONFORMANCE    |
| IL Max/Master (Acceptance) | 0.30dB    | IEC 61300-3-4  |
| Ave/Master                 | 0.15dB    | IEC 61300-3-4  |
| Ave/Random                 | 0.20dB    | IEC 61300-3-34 |

Cable Specification

|                            |                         |                         |
|----------------------------|-------------------------|-------------------------|
| CHARACTERISTICS            | SIMPLEX                 | DUPLEX                  |
| Cable Material             | PVC, OFNR, OFNP or LSZH | PVC, OFNR, OFNP or LSZH |
| Strength Member            | Aramid                  | Aramid                  |
| Crush (N)                  | 1000                    | 1000                    |
| Operating Temperature (?C) | -20 to 60               | -20 to 60               |
| Fire Specification         | IEC 60332-1             | IEC 60332-1             |

Fiber Specification

|                          |                            |
|--------------------------|----------------------------|
| CHARACTERISTICS          |                            |
| Attenuation (dB) / km    | 2.8 @ 850nm / 0.8 @ 1300nm |
| Bandwidth OFL (MHz x km) | 220 @ 850nm / 600 @ 1300nm |