


12M SC/SC MM DPX 62.5/125UM Fiber Patch Cord

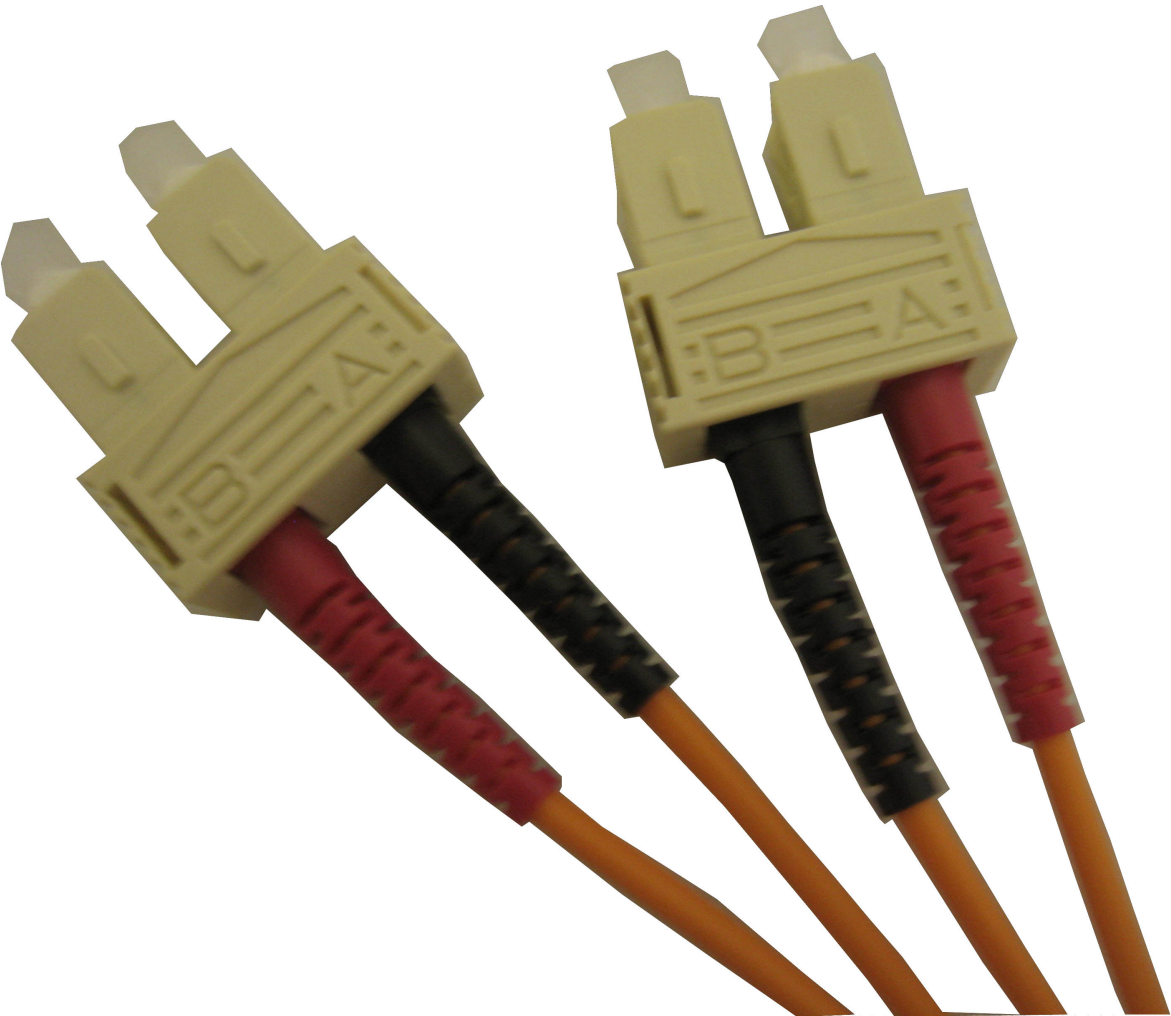

FB-CL-MD6-12

Rating: Not Rated Yet
24 h

[Ask a question about this product](#)

Manufacturer [Cables and Chips Inc](#)

Description

Connector Specification

OPTICAL PERFORMANCE

MULTIMODE

CONFORMANCE

OPTICAL PERFORMANCE	MULTIMODE	CONFORMANCE
IL Max/Master (Acceptance)	0.30dB	IEC 61300-3-4
Ave/Master	0.15dB	IEC 61300-3-4
Ave/Random	0.20dB	IEC 61300-3-34

Cable Specification

CHARACTERISTICS	SIMPLEX	DUPLEX
Cable Material	PVC, OFNR, OFNP or LSZH	PVC, OFNR, OFNP or LSZH
Strength Member	Aramid	Aramid
Crush (N)	1000	1000
Operating Temperature (?C)	-20 to 60	-20 to 60
Fire Specification	IEC 60332-1	IEC 60332-1

Fiber Specification

CHARACTERISTICS	
Attenuation (dB) / km	2.8 @ 850nm / 0.8 @ 1300nm
Bandwidth OFL (MHz x km)	220 @ 850nm / 600 @ 1300nm