


## 1M LC/LC MM DPX 10GB 50/125um Fiber Patchcord

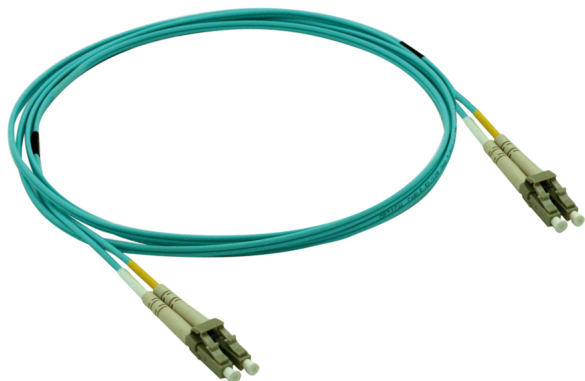

FB-LL-MDO3-01

Rating: Not Rated Yet

[Ask a question about this product](#)

Manufacturer [Cables and Chips Inc](#)

### Description

All our fiber cables are 100% tested

### Connector Specification

OPTICAL PERFORMANCE	MULTIMODE	CONFORMANCE
IL Max/Master (Acceptance)	0.30dB	IEC 61300-3-4
Ave/Master	0.15dB	IEC 61300-3-4
Ave/Random	0.20dB	IEC 61300-3-34

### Cable Specification

CHARACTERISTICS	
Cable Material	PVC, OFNR, OFNP or LSZH
Strength Member	Aramid
Crush (N)	1000
Operating Temperature (?C)	-20 to 60
Fire Specification	IEC 60332-1

### Fiber Specification

CHARACTERISTICS

# 1M OM3 LC 50/125 multimode fiber optic cables

---

## CHARACTERISTICS

Attenuation (dB) / km

2.8 @ 850nm / 0.8 @ 1310nm

Bandwidth OFL (MHz x km)

1500 @ 850nm / 500 @ 1310nm

Bandwidth LEMB (MHz X km)

2000 @ 850nm