


3M SC/LC MM DPX 40GB 50/125um Fiber Patchcord

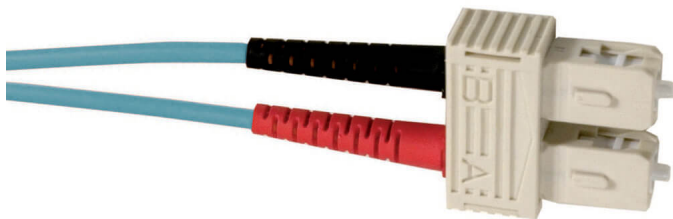

FB-CL-MDO4-03

Rating: Not Rated Yet

[Ask a question about this product](#)

Manufacturer [Cables and Chips Inc](#)

Description

Connector Specification

OPTICAL PERFORMANCE
IL Max/Master (Acceptance)
Ave/Master
Ave/Random

MULTIMODE
0.30dB
0.15dB
0.20dB

CONFORMANCE
IEC 61300-3-4
IEC 61300-3-4
IEC 61300-3-34

Cable Specification

CHARACTERISTICS
Cable Material
Strength Member
Crush (N)
Operating Temperature (?C)
Fire Specification

LSZH or PVC
Aramid
1000
-20 to 60
IEC 60332-1

Fiber Specification

CHARACTERISTICS

Attenuation (dB) / km

2.8 @ 850nm / 0.8 @ 1310nm

Bandwidth OFL (MHz x km)

3500 @ 850nm / 500 @ 1310nm