


## LC to SC Multimode Duplex OM2 50/125um Fiber Patch Cord

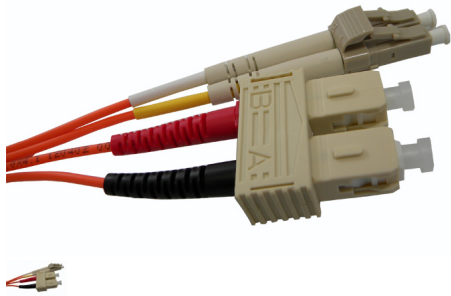

From 1 Meter to 50 Meter

Rating: Not Rated Yet  
24 h  
\*\*\*\*\*

[Ask a question about this product](#)

Manufacturer: [Cables and Chips Inc](#)

Description

### Connector Specification

OPTICAL PERFORMANCE	MULTIMODE	CONFORMANCE
IL Max/Master (Acceptance)	0.30dB	IEC 61300-3-4
Ave/Master	0.15dB	IEC 61300-3-4
Ave/Random	0.20dB	IEC 61300-3-34

### Cable Specification

CHARACTERISTICS	SIMPLEX	DUPLEX
Cable Material	PVC, OFNR, OFNP or LSZH	PVC, OFNR, OFNP or LSZH
Strength Member	Aramid	Aramid
Crush (N)	1000	1000
Operating Temperature (?C)	-20 to 60	-20 to 60
Fire Specification	IEC 60332-1	IEC 60332-1

### Fiber Specification

CHARACTERISTICS	
Attenuation (dB) / km	2.8 @ 850nm / 0.8 @ 1300nm
Bandwidth OFL (MHz x km)	220 @ 850nm / 600 @ 1300nm