


SC to LC Multimode Duplex OM3 50/125um Fiber Patchcord

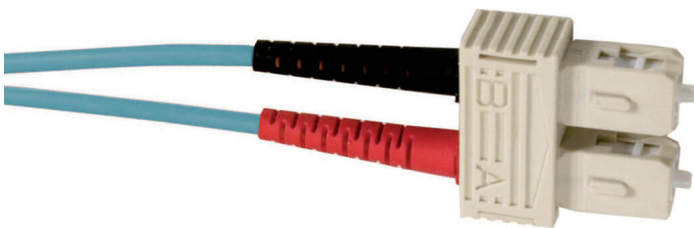

From 1meter to 50meter

Rating: Not Rated Yet
24 h

[Ask a question about this product](#)

Manufacturer [Cables and Chips Inc](#)

Description

Connector Specification

| OPTICAL PERFORMANCE | MULTIMODE | CONFORMANCE |
|----------------------------|-----------|----------------|
| IL Max/Master (Acceptance) | 0.30dB | IEC 61300-3-4 |
| Ave/Master | 0.15dB | IEC 61300-3-4 |
| Ave/Random | 0.20dB | IEC 61300-3-34 |

Cable Specification

| CHARACTERISTICS | |
|----------------------------|-------------------------|
| Cable Material | PVC, OFNR, OFNP or LSZH |
| Strength Member | Aramid |
| Crush (N) | 1000 |
| Operating Temperature (?C) | -20 to 60 |
| Fire Specification | IEC 60332-1 |

Fiber Specification

CHARACTERISTICS

Attenuation (dB) / km

2.8 @ 850nm / 0.8 @ 1310nm

Bandwidth OFL (MHz x km)

1500 @ 850nm / 500 @ 1310nm

Bandwidth LEMB (MHz X km)

2000 @ 850nm